



## 4008

Configuration with 2-way satellites and subwoofers powered by amps with DSP

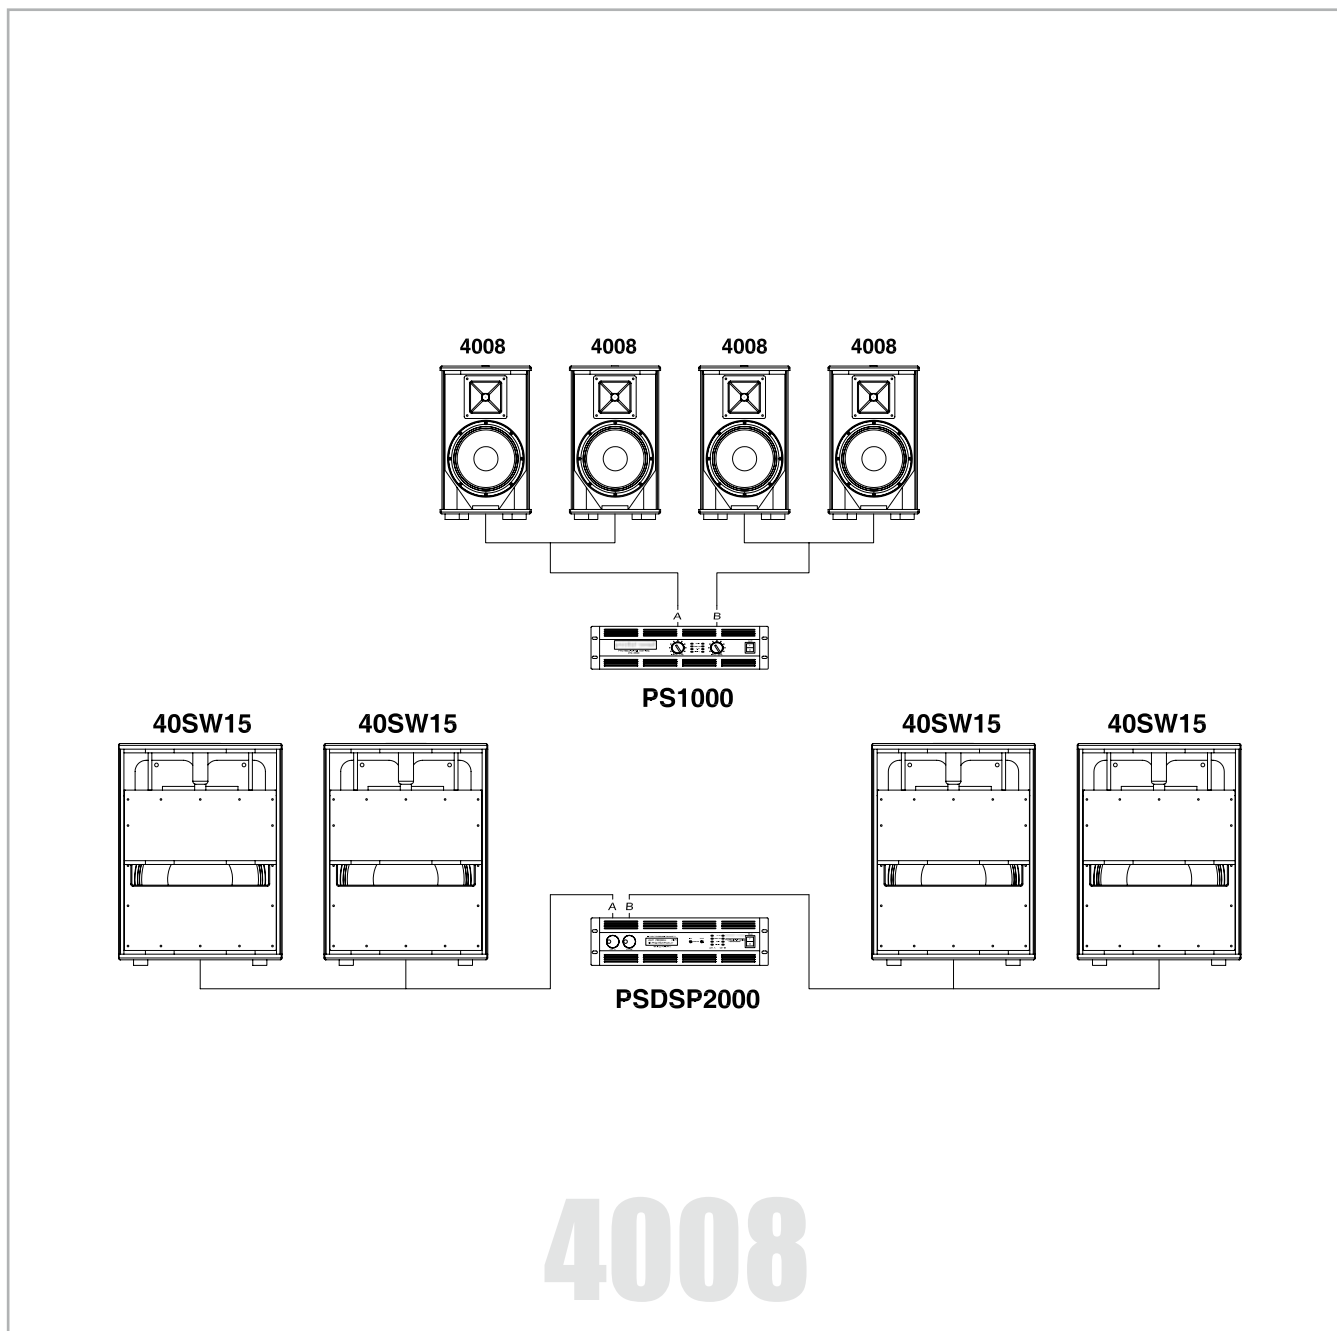

### PRODUCTS

No.	Code	Description
4	<b>4008</b>	Professional Loudspeaker System - Power handling RMS: 220 W - Impedance: 8 Ohm
4	<b>40SW15</b>	Professional Subwoofer - Power handling RMS: 550 W - Impedance: 8 Ohm
1	<b>PS1000</b>	Stereo Power Amplifier - Power RMS: 2x450 W (@4 Ohm), 2x280 W (@8 Ohm)
1	<b>PSDSP2000</b>	Stereo Power Amplifier with DSP - Power RMS: 2x1000 W (@4 Ohm), 2x650 W (@8 Ohm)

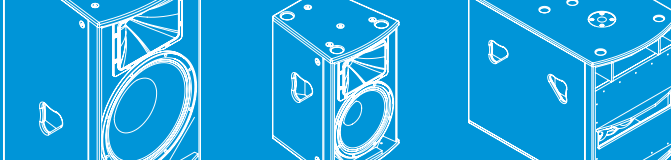

## APPLICATIONS

- Rehearsal studios, demo rooms;
- Dance clubs, night clubs, ballroom dancing and other dancing venues;
- Wine/lounge bars and HO.RE.CA. (*Hotels, Restaurants and Cafés*);
- Beach clubs, bathing establishments;
- Casinos, game rooms, cruise ships (background music only);
- Amusement parks, theme parks, circus shows;
- Multi-purpose halls, sport, recreational and/or cultural venues;
- Convention and trade show centres;
- Corporate events;
- Beauty salons, fitness centres;
- Other fixed installations (shopping malls, shops, airports, etc.).

## BRIEF DESCRIPTION

- Speaker Total Power Handling: **3080 W RMS**;
- Amplifier Total Power: **2900 W** (@ 4 Ohm);
- Covered Area: **50 m<sup>2</sup>** ;
- Quality/Price Ratio: ●●●●○;
- Perfect for **background music** and for obtaining a **right sound distribution** in zones/areas with medium-high music density.

## CONNECTORS

The **Forty** series loudspeaker systems are fitted with a pair of *Neutrik® speakOn NL4* connectors. The 2 pins of these connectors are wired in parallel. The double *speakOn* connector permits a parallel connection of a further loudspeaker system of the same type.

The **4008** satellite uses only pin assignments 1+/1- for the full range mode, as well as the **40SW15** subwoofer.

TYPE \ PINS	1+	1-	2+	2-
<b>NL4</b>	4008 full range input +	4008 full range input -	/	/
<b>NL4</b>	40SW15 input +	40SW15 input -	/	/

## PROCESSOR PRESETS

DSP UNIT	PRESET NAME ON AMPLIFIER DISPLAY	SOUND FILE	FUNCTION
<b>PSDSP2000</b>	<b>40SW15L</b>	40SW15_LP90(PSDSP2000).DP6	40SW15 subwoofer
	<b>40SW15L</b>	40SW15_LP110(PSDSP2000).DP6	40SW15 subwoofer with higher low-pass frequency

## ACCESSORIES

Code	Description
<b>STD-4008</b>	Horizontal flying bracket for Forty 4008 loudspeaker system + 10MA adapter flange
<b>PS-GN</b>	Stainless steel hook for attachment to a rigging system
<b>STD-WALL</b>	Wall bracket for vertical support of 1 Forty series upper module (except for 4030MH speaker)
<b>PS-ST100</b>	Adjustable-height stand holder for subwoofer-upper module connection (except for 4030MH speaker)
<b>PS-ST125</b>	Adjustable-height three-legged stand for 1 Forty series upper module (except for 4030MH speaker)