



4010MH

Configuration with Modelled Horn satellites and subwoofers powered by amps with DSP

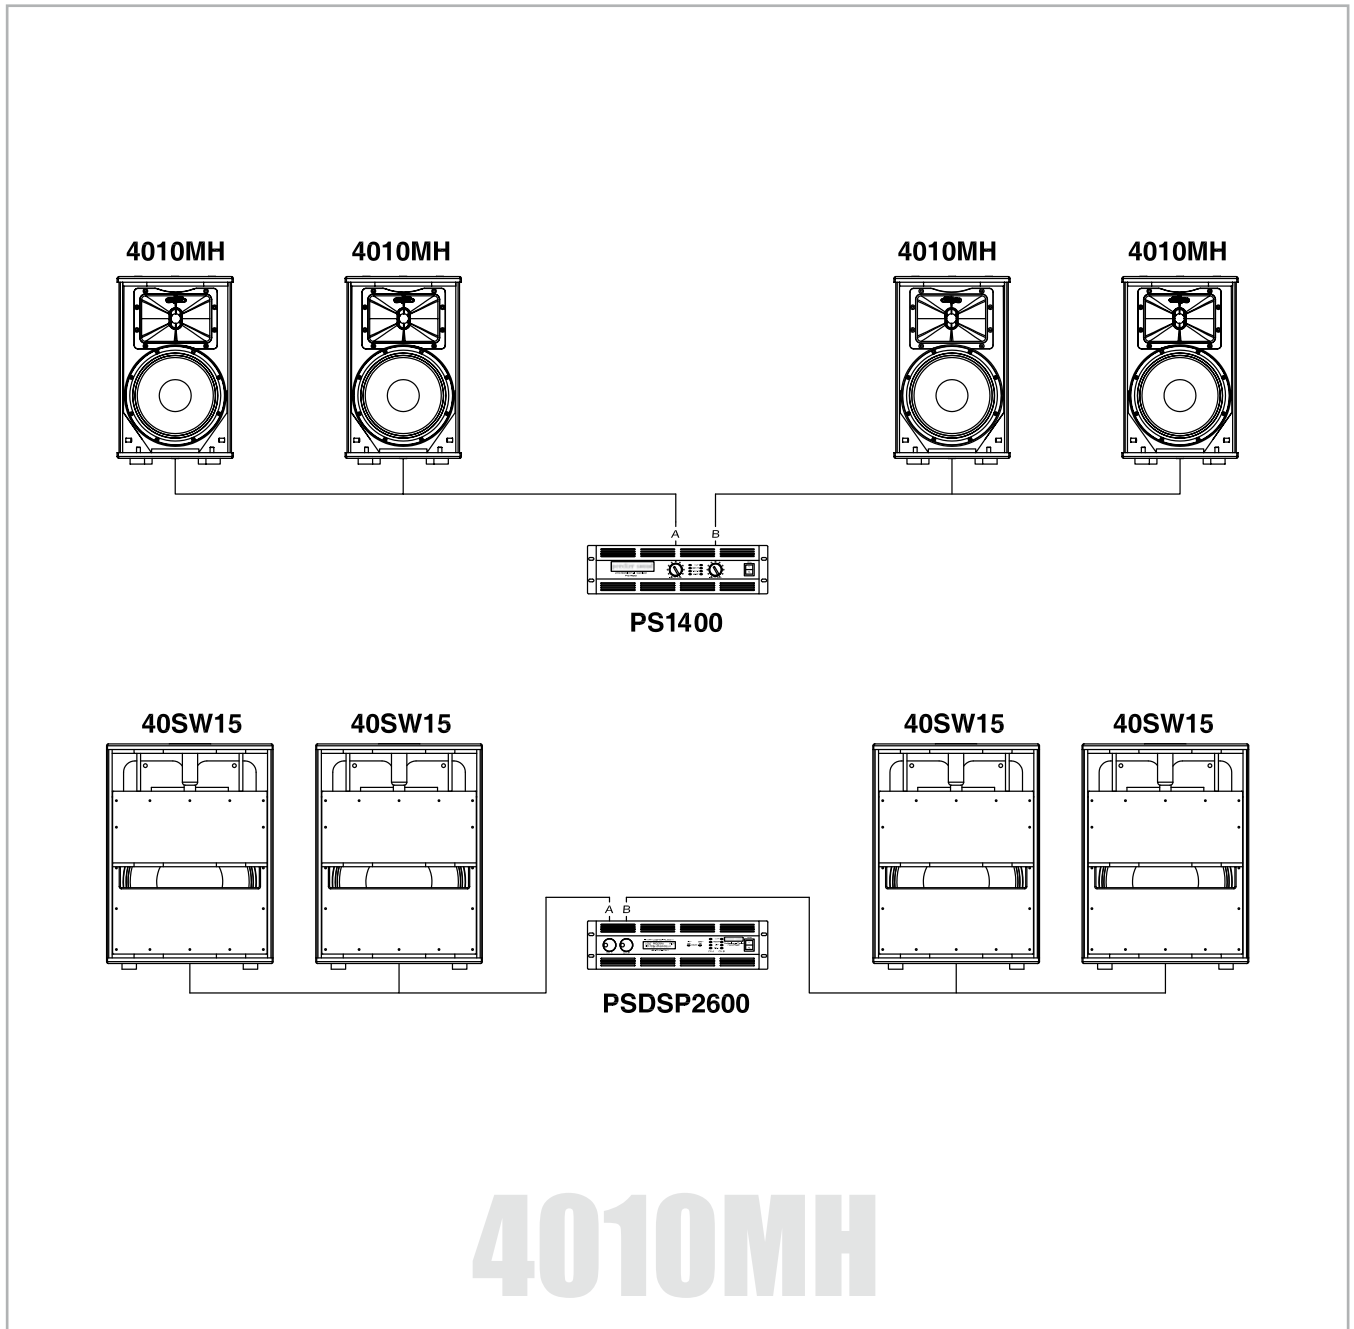

PRODUCTS

No.	Code	Description
4	4010MH	Professional Loudspeaker System with Modelled Horn - Power RMS: 300 W - Imp.: 8 Ohm
4	40SW15	Professional Subwoofer - Power handling RMS: 550 W - Impedance: 8 Ohm
1	PS1400	Stereo Power Amplifier - Power RMS: 2x700 W (@4 Ohm), 2x450 W (@8 Ohm)
1	PSDSP2600	Stereo Power Amplifier - Power RMS: 2x1300 W (@4 Ohm), 2x850 W (@8 Ohm)

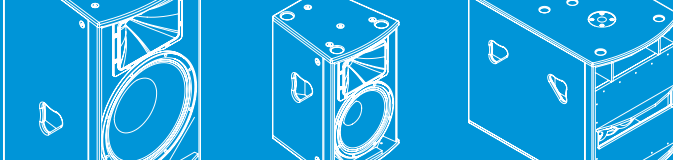

APPLICATIONS

- Rehearsal studios, demo rooms;
- Dance clubs, night clubs, ballroom dancing and other dancing venues;
- Wine/lounge bars and HO.RE.CA. (*Hotels, Restaurants and Cafés*);
- Beach clubs, bathing establishments;
- Casinos, game rooms, cruise ships (*background music only*);
- Amusement parks, theme parks, circus shows;
- Multi-purpose halls, sport, recreational and/or cultural venues;
- Convention and trade show centres;
- Corporate events;
- Beauty salons, fitness centres;
- Other fixed installations (shopping malls, shops, airports, etc.).

BRIEF DESCRIPTION

- Speaker Total Power Handling: **3400 W RMS**;
- Amplifier Total Power: **4000 W** (@ 4 Ohm);
- Covered Area: **72 m²** ;
- Quality/Price Ratio: ●●○○○;
- Specifically designed for listening environments **with tailored music** such as exhibit halls, intimate/private areas in night clubs, etc.

CONNECTORS

The **Forty** series loudspeaker systems are fitted with a pair of *Neutrik® speakOn NL4* connectors. The 2 pins of these connectors are wired in parallel. The double speakOn connector permits a parallel connection of a further loudspeaker system of the same type.

The **4010MH** satellite uses only pin assignments 1+/1- for the full range mode, as well as the **40SW15** subwoofer.

TYPE	PINS	1+	1-	2+	2-
NL4		4010MH full range input +	4010MH full range input -	/	/
NL4		40SW15 input +	40SW15 input -	/	/

PROCESSOR PRESETS

DSP UNIT	PRESET NAME ON AMPLIFIER DISPLAY	SOUND FILE	FUNCTION
PSDSP2000	40SW15L	40SW15_LP90(PSDSP2000).DP6	40SW15 subwoofer
	40SW15L	40SW15_LP110(PSDSP2000).DP6	40SW15 subwoofer with higher low-pass frequency

ACCESSORIES

Code	Description
STD-4010	Horizontal flying bracket for Forty 4010MH loudspeaker system + 10MA adapter flange
PS-GN	Stainless steel hook for attachment to a rigging system
STD-WALL	Wall bracket for vertical support of one Forty series upper module (except for 4030MH speaker)
PS-OC6	Kit of three 10MA eyelets for vertical hanging of one Forty series upper module (except for 4008 speaker)
PS-ST100	Adjustable-height stand holder for subwoofer-upper module connection (except for 4030MH speaker)
PS-ST125	Adjustable-height three-legged stand for one Forty series upper module (except for 4030MH speaker)

SOUND REINFORCEMENT

CONTROLLED RADIATION

ACOUSTIC RESEARCH